

## Magellan 8xxx Barcode Sheet


For older scanners that don't support 2D barcodes

[Magellan 8500X Product Reference Guide](#)

### Perform a full factory reset:

**Configure the scanner:** Scan in order. The scanner will reboot after scanning the last barcode.

1. Enter Programming Mode

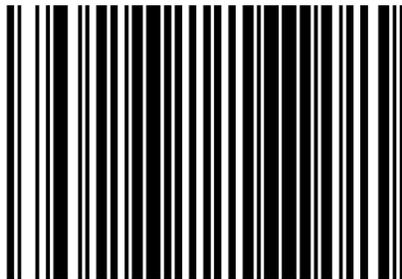

SWITCH LABEL

2. RS-232 Single Cable Mode



INTERFACE TYPE = RS-232 SINGLE CABLE

3 Check Characters



EAN-13 CHECK CHARACTER TRANSMISSION = ENABLE




UPC-E CHECK CHARACTER TRANSMISSION = ENABLE



UPC-A CHECK CHARACTER TRANSMISSION = ENABLE

4. Exit Programming Mode

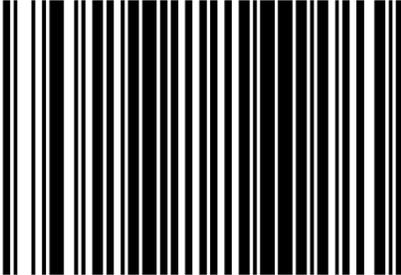

SWITCH LABEL