


Magellan 9xxx Barcode Sheet

Compatible with all 9xxx models that support 2D barcodes

[Magellan 9900i Product Reference Guide](#)


Perform a full factory reset: A hard factory reset is recommended for devices previously configured for another POS system. Scanner will reboot.

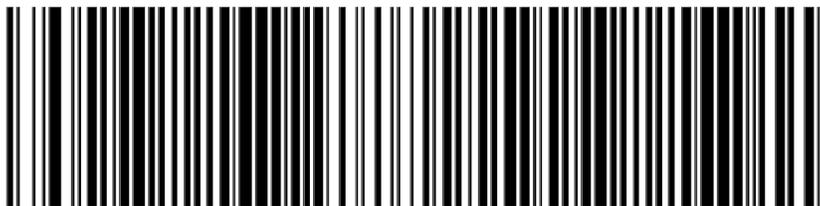


RETURN TO FACTORY SETTINGS

Configure the scanner: Scan in order. The scanner will reboot after scanning the last barcode.

1. Enter Configuration

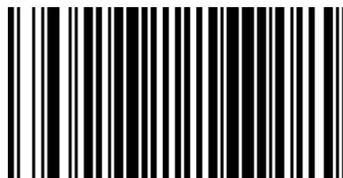

2. POS Scanner Interface Type: RS232-SC



3. UPCA Check Character Transmission: Enable,
EAN13 Check Character Transmission: Enable,
EAN8 Check Character Transmission: Enable,
Enforced Zero Return Enable: Non-zero for 4 min



4. Exit Configuration

